


A  
A

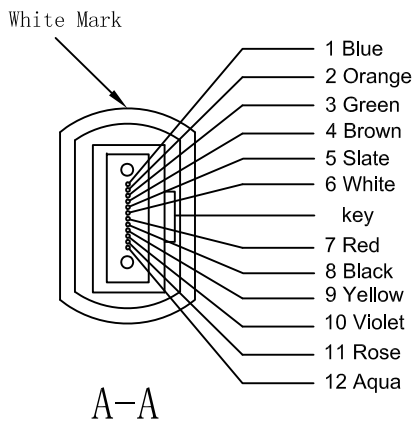

**Options - Please tick as required**

- OM1 - Orange
- OM2 - Orange
- OM3 - Aqua
- OM4 - Aqua
- OS2 - Yellow
- MTP/MPO**
- Male
- Female

Connector Spec:

| Type            | MM     | MM Low Loss | SM      | SM Low Loss |
|-----------------|--------|-------------|---------|-------------|
| Insertion Loss  | ≤0.6dB | ≤0.35dB     | ≤0.75dB | ≤0.35dB     |
| Return Loss     | ≥20dB  | ≥20dB       | ≥60dB   | ≥60dB       |
| Test wavelength | 850nm  | 850nm       | 1550nm  | 1550nm      |

Length Tolerance:

| Length (L) | Tolerance  |
|------------|------------|
| <1m        | +50<br>-0  |
| 1≤L<10m    | +100<br>-0 |
| ≥10m       | +1%<br>-0  |

|             |                                 |  |          |      |       |    |
|-------------|---------------------------------|--|----------|------|-------|----|
| Name        | 12F MPO/MTP-LC Duplex Patchcord |  |          |      | Units | mm |
| Draw No.    | PC12-MPO/MTP-6DLC-20-SM/MM-01   |  |          |      | Scale |    |
| Drawn by    | Date                            |  | Material | Rev. | 1.0   |    |
| Checked by  | Date                            |  |          |      |       |    |
| Approved by | Date                            |  |          |      |       |    |